

KAKU

導軌世家

DIN 導軌
鋼制與鋁制導軌

DIN RAIL
STEEL RAIL
ALUMINUM RAIL

PART-3



PART-3

導軌世家

KAKU系列導軌之產品是按國際標準規格制作，具有外觀美、精度高、強度佳、質量保證等特性。
KAKU manufacture rails according International standard with excellent precision, strong intensity and so on.

鋼質系列導軌 Steel DIN rail

原材料是采用上海寶鋼冷軋鋼板，經電氣鍍鋅+鉻酸鈍化處理，耐腐蝕，鹽霧試驗測試達95Hr。
We use material from Shanghai BAO steel, through with Zn plating and chromate treatment, it's corrosion resistant, the results of Salt Spray Test is 95 hours!

鋁質系列導軌 Aluminum DIN rail

采用高強度鋁合金，經時效熱處理及氧化處理，增加其強度及耐腐蝕性。
We use strong intensity aluminum alloy(6063), through with aging heat treatment and oxidation treatment, intensity and corrosion resistant increased!

鍍鎳、鍍鉻導軌 Nickel-plate rail & Chromeplate rail

具有超強耐腐蝕之特性，鹽霧試驗測試達144Hr。
Supper corrosion resistant, the results of Salt Spray Test is 144 hours.

導軌切斷器 Rail Cutter

裁切導軌之專用工具，具有切割面光滑、無毛刺、省時省力、使用、攜帶方便之特性。
Specially use for cutting rail with smooth cutting face, it's very convenient for use and carry.

注意：鋼、鋁切斷器不可通用，型號可自由選配。
PS: cutter for steel and for aluminum should not be fixed use.

KAKU

SDR I 100AA/I 200AA

Steel DIN Rail 鋼製導軌

SDR I 100AA/I 200AA


72

經濟加強型鋼製導軌


Economical Steel Rails

從控製盤設計到組立配線，可大幅度提升效率，降低成本！
The efficiency is increased! The cost is decreased!

- 經濟耐用
Durable quality
- 價格優廉
Competitive price
- 強度保證
Good intensity
- 精度準確
Excellent precision

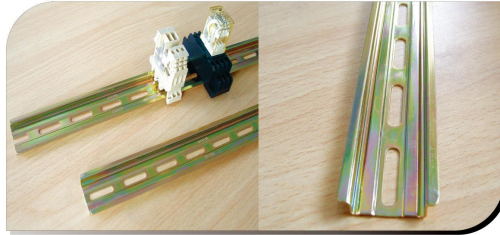


| 型號 Model | 材質 Material | 長度 Length (mm) | 包裝(根/盒) Package quantity (PCS) |
|-------------|-----------------------------------|----------------------|--------------------------------------|
| SDR-1100AA | 經電氣鍍鋅和鉻酸鈍化處理(冷軋鋼板) | 1000 | 100 |
| SDR-1200AA | Zn plating and chromate treatment | 2000 | 40 |

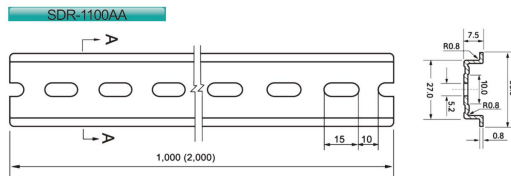


SDR- & SNS- SERIES

Steel DIN Rail 鋼製導軌


SDR-1100




SDR-5100




SNS-3215




SDR-7525



SNS-1500



從控製盤設計到組立配線，可大幅度提升效率，降低成本！
The efficiency is increased! The cost is decreased!

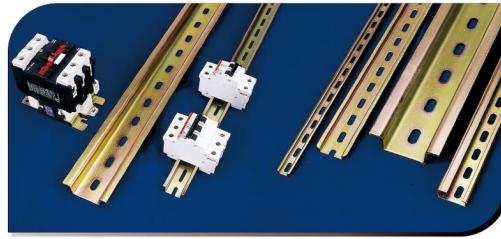

| 型號 Model | 材質 Material | 長度 Length (mm) | 包裝(個/盒) Package quantity (PCS) |
|-------------|---|----------------------|--------------------------------------|
| SDR-1100 | 經電氣鍍鋅和鉻酸鈍化處理(冷軋鋼板) Zn plating and chromate treatment | 1000 | 50 |
| SDR-1200 | | 2000 | 40 |
| SDR-5100 | | 1000 | 40 |
| SDR-5200 | | 2000 | 24 |
| SNS-3215-1 | | 1000 | 40 |
| SNS-3215-2 | | 2000 | 24 |
| SNS-1500 | | 1000 | 100 |
| SDR-7525 | | 1000 | |

SDR- & SNS- SERIES


MENSURABLE DIN RAIL

Steel DIN Rail 鋼製定長導軌

MENSURABLE DIN RAIL



從控制盤設計到組立配線，可大幅度提升效率，降低成本！
The efficiency is increased! The cost is decreased!

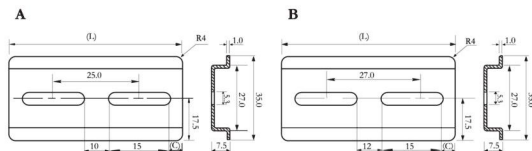


定長鋼質導軌規格一覽表 Mensurable DIN rail list

| 型號 Model | 長度 Length (mm) | 孔數 Quantity of holes | 孔到邊距離 C Distance from bore to side (mm) | 單位重量 Weight (g) | 包裝(每盒) Package quantity (PCS) | 淨重 Net Weight (Kg) | 圖例 Remark |
|-------------|----------------------|----------------------------|---|-----------------------|-------------------------------------|--------------------------|--------------|
| SDR-1008 | 80.0 | 3 | 5.5 | 27.2 | 500 | 13.60 | B |
| SDR-1010 | 100.0 | 4 | 5.0 | 34.0 | 500 | 17.00 | A |
| SDR-1012 | 120.0 | 5 | 2.5 | 40.8 | 400 | 16.32 | A |
| SDR-1015 | 150.0 | 6 | 5.0 | 51.0 | 400 | 20.40 | A |
| SDR-1016 | 160.0 | 6 | 5.0 | 54.4 | 400 | 21.76 | B |
| SDR-1020 | 200.0 | 8 | 5.0 | 68.0 | 300 | 20.40 | A |
| SDR-1024 | 240.0 | 9 | 4.5 | 81.6 | 250 | 20.40 | B |
| SDR-1025 | 250.0 | 10 | 5.0 | 85.0 | 250 | 21.25 | A |
| SDR-1030 | 300.0 | 12 | 5.0 | 102.2 | 200 | 20.40 | A |
| SDR-1035 | 350.0 | 14 | 5.0 | 119.0 | 200 | 23.80 | A |
| SDR-1040 | 400.0 | 16 | 5.0 | 136.0 | 150 | 20.40 | A |
| SDR-1045 | 450.0 | 18 | 5.0 | 153.0 | 150 | 22.95 | A |
| SDR-1050 | 500.0 | 20 | 5.0 | 170.0 | 100 | 17.00 | A |
| SDR-1055 | 550.0 | 22 | 5.0 | 187.0 | 100 | 18.70 | A |
| SDR-1060 | 600.0 | 24 | 5.0 | 204.0 | 100 | 20.40 | A |
| SDR-1065 | 650.0 | 26 | 5.0 | 221.0 | 100 | 22.10 | A |
| SDR-1070 | 700.0 | 28 | 5.0 | 238.0 | 80 | 19.04 | A |
| SDR-1075 | 750.0 | 30 | 5.0 | 255.0 | 80 | 20.40 | A |
| SDR-1080 | 800.0 | 32 | 5.0 | 272.0 | 80 | 21.76 | A |
| SDR-1085 | 850.0 | 34 | 5.0 | 289.0 | 70 | 20.23 | A |
| SDR-1090 | 900.0 | 36 | 5.0 | 306.0 | 70 | 21.42 | A |


工藝流程：精密滾壓成型>定尺裁切>沖孔加工>電氣鍍鋅；電鍍工藝：電氣鍍五彩鋅工藝（電鍍鋅+鎳酸鈍化處理）；主要技術參數符合ISO-IEC國際標準
Process: exactly roll press> cut with mensurable ruler> punching process> Zinc plating; Pating: color Zinc plating or white Zinc plating. The parameter meets ISO-IEC standard.

DR-, ANS-&KSG- SERIES

Aluminium DIN Rail 鋁合金導軌

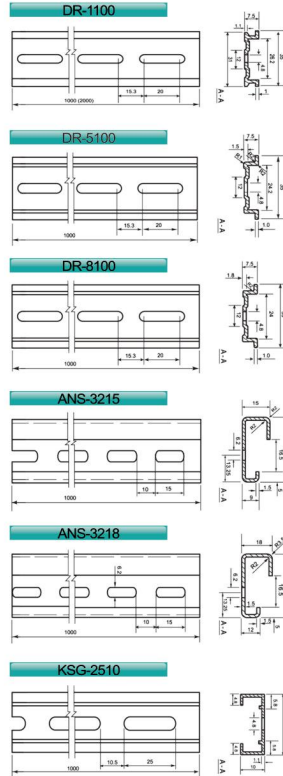

從控制盤設計到組立配線，可大幅度提升效率，降低成本！
The efficiency is increased! The cost is decreased!

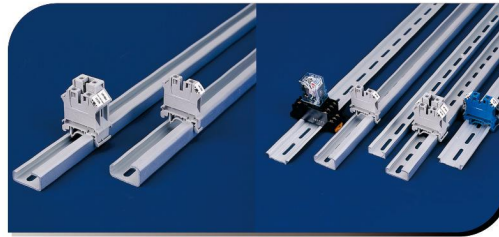

| 型號 Model | 材質 Material | 長度 Length (mm) | 包裝(個/盒) Package quantity (PCS) |
|-------------|--|----------------------|--------------------------------------|
| DR-1100 | 高強度鋁合金 (經封孔氧化處理) aging heat treatment and oxidation treatment | 1000 | 100 |
| DR-1200 | | 2000 | 60 |
| DR-5100 | | 1000 | 100 |
| DR-8100 | | 1000 | 100 |
| ANS-3215 | | 1000 | 40 |
| ANS-3218 | | 1000 | 100 |
| KSG-2510 | | 1000 | 100 |



RAIL 金屬導軌系列

RAIL CUTTER

導軌切斷器

RAIL CUTTER

76

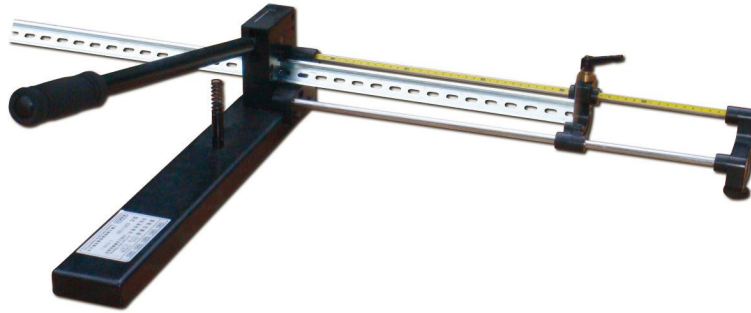

| 型號 Model | 適用的導軌型號 Suited Din Rail Item | 淨重 Weight |
|-------------|--|--------------|
| QDA-1 | SDR-1100AA | 4.90Kg |
| QDA-3 | SDR-1100 | 9.30Kg |
| QDG-2 | SDR-1100 SNS-1500 | 9.30Kg |
| QDG-4 | SDR-1100 SNS-1500 SDR-5100 SNS-3215 | 15.00Kg |
| QDL-10 | DR-1100 | 3.30Kg |
| QDL-11 | DR-5100 | 3.30Kg |
| QDL-12 | DR-8100 | 3.30Kg |
| QDL-20 | DR-1100 ANS-3215 | 8.30Kg |
| QDL-21 | DR-1100 ANS-3218 | 8.30Kg |
| QDL-22 | DR-1100 KSG-2510 | 8.30Kg |
| QDL-23 | DR-5100 ANS-3215 | 8.30Kg |

KAKU

www.shkaku.com 最新數據資訊，請于網上查詢！Please check our website in case any update information.